

10/511218

PCT/IB 03/01256  
01.04.03



Europäisches  
Patentamt

European  
Patent Office

Office européen  
des brevets

REC'D 16 APR 2003

WIPO

PCT

Bescheinigung

Certificate

Attestation

Die angehefteten Unterla-  
gen stimmen mit der  
ursprünglich eingereichten  
Fassung der auf dem näch-  
sten Blatt bezeichneten  
europäischen Patentanmel-  
dung überein.

The attached documents  
are exact copies of the  
European patent application  
described on the following  
page, as originally filed.

Les documents fixés à  
cette attestation sont  
conformes à la version  
initialement déposée de  
la demande de brevet  
européen spécifiée à la  
page suivante.

Patentanmeldung Nr. Patent application No. Demande de brevet n°

02076527.7

Der Präsident des Europäischen Patentamts;  
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets  
p.o.

**PRIORITY  
DOCUMENT**  
SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH RULE 17.1(a) OR (b)

R C van Dijk

BEST AVAILABLE COPY



Europäisches  
Patentamt

European  
Patent Office

Office européen  
des brevets

Anmeldung Nr:  
Application no.: 02076527.7  
Demande no:

Anmeldetag:  
Date of filing: 18.04.02  
Date de dépôt:

Anmelder/Applicant(s)/Demandeur(s):

Koninklijke Philips Electronics N.V.  
Groenewoudseweg 1  
5621 BA Eindhoven  
PAYS-BAS

Bezeichnung der Erfindung/Title of the invention/Titre de l'invention:  
(Falls die Bezeichnung der Erfindung nicht angegeben ist, siehe Beschreibung.  
If no title is shown please refer to the description.  
Si aucun titre n'est indiqué se référer à la description.)

Method of copy detection and protection using non-standard TOC entries

In Anspruch genommene Priorität(en) / Priority(ies) claimed /Priorité(s)  
revendiquée(s)  
Staat/Tag/Aktenzeichen/State/Date/File no./Pays/Date/Numéro de dépôt:

Internationale Patentklassifikation/International Patent Classification/  
Classification internationale des brevets:

G11B20/00

Am Anmeldetag benannte Vertragstaaten/Contracting states designated at date of  
filing/Etats contractants désignées lors du dépôt:

AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU MC NL PT SE TR

Method of copy detection and protection using non-standard TOC entries

EPO - DG 1

18. 04. 2002

(51)

The invention relates to a method of copy detection of a record carrier on which table of content (TOC) entries are mastered. The invention relates further to a method of read-out of such a record carrier, to corresponding apparatuses, to such a record carrier itself and to a computer program for implementing said methods.

5 WO 00/74053 A1 discloses a method of copy protecting a digital audio CD, wherein control data usable by a data reader is encoded on the compact disc. In order to copy protect the disc selected control data is rendered incorrect and/or inaccurate. An audio CD can thus be played normally on an audio player; however, the incorrect data renders the audio CD unplayable by a data reader such as a CD-ROM drive of a PC. In an embodiment  
10 disclosed therein, data in the table of contents of the CD is rendered incorrect, e.g. by setting the Atime from the start of the disc program area to lead-out to zero or by identifying audio tracks erroneously as data tracks.

It is often desired to generate a unique identifier of a record carrier by a distributor or sales point of said record carrier which can be used to distinguish between an  
15 original record carrier and a copied record carrier in an easy way. It is therefore an object of the present invention to provide a method of copy detection and protection of a record carrier which allows a replay device to distinguish between an original and a copy of a record carrier, but which does not generally render a copy unplayable e.g. by a data reader such as a CD-ROM drive when accessing an audio CD. Further, a corresponding method of read-out of  
20 such a record carrier shall be provided.

This object is achieved according to the present invention by a method as claimed in claim 1, wherein said table of content entries are mastered on said record carrier in a detectable non-standard way. This means, that the table of contents itself is accessible and readable by a conventional replay device. However, after a firmware change it will be  
25 enabled to detect if the record carrier is an original or a copy by checking if the table of content entries are mastered in the standard or a non-standard way. A conventional replay device accessing a record carrier on which the TOC entries are mastered in a non-standard way will reconstruct the correct TOC table into a standard way so that, when copying said record carrier to a recordable or rewritable record carrier, such as a CD-R/RW, the TOC

entries will be written in the standard way. The term "non-standard" thus covers all possibilities of changes to the table of contents which still allow the reading of the table of contents by a conventional replay device, but which is detectable after a firmware change. The term "standard way" in this connection means any way which is conventionally used  
5 when mastering TOC entries on a record carrier, i.e. a way which is defined in a corresponding standard such as the Red Book for CD audio or the Yellow Book for CD-ROM or which is agreed upon by manufacturers and users of certain types of record carriers.

Preferred embodiments of the invention are defined in the dependent claims. A method of read-out of a record carrier on which table of content entries are mastered is  
10 defined in claim 11, comprising the steps of:

- reading said table of content entries,
- checking if said table of content entries are mastered in a standard or a non-standard way, and
- outputting a signal indicating if said table of content entries are mastered in the  
15 standard or in a non-standard way.

A corresponding apparatus for copy detection and an apparatus for read-out of a record carrier are defined in claims 15 and 16. A record carrier according to the present invention is defined in claim 17. The invention still further relates to a computer program for implementing the methods according to the present invention as claimed in claim 18.

20 There is hacker software available which enables a user to edit the TOC entries, to change their relative position and to add new TOC entries. According to preferred embodiments of the invention as defined in claims 2 to 4, non-standard ways of mastering the TOC entries on the record carrier are selected, which go beyond the possibilities of such hacking software or which can not be implemented in a straightforward way. For example,  
25 such hacking software does not allow to change the number of repeats of TOC entries which is, for CD audio, always three, and does not allow to copy e.g. subcode-Q mode-2 frames. Generally, any modification of the TOC affects the whole lead-in area.

An additional or alternative method of providing the possibility to distinguish between a copy and an original record carrier is defined in claim 5 comprising the steps of:  
30 - storing subcode data on said record carrier in subcode frames of a subcode channel, each subcode frame comprising synchronization symbols and data symbols at predetermined positions within said subcode frame, and  
- assigning and storing a number of additional synchronization symbols to at least one subcode frame at positions provided for data symbols so that during read-out of said

subcode channel a check signal can be generated indicating the presence or absence of said additional synchronization symbols.

According to said embodiment an interrupt could be generated as check signal during read-out in response to the detection of said additional synchronization symbols indicating that a synchronization is detected too early. Since such additional synchronization symbols do not correspond to correct subcode byte values, they can not be copied. When a record carrier including such additional synchronization symbols is copied, said additional synchronization symbols are mapped to correct subcode byte values, probably zero. As a result, the copied record carrier does not have additional synchronization symbols which allows to distinguish between an original and a copy. Further preferred embodiments thereof are defined in claims 6 to 10.

The invention will now be explained more in detail with reference to the Figures, in which

Fig. 1 shows the mastering of TOC entries in an non-standard way,

Fig. 2 shows a block diagram of an encoder according to a first embodiment of the invention,

Fig. 3 shows a block diagram of a decoder according to a first embodiment of the invention,

Fig. 4 shows a Q-channel subcode frame comprising additional synchronization symbols according to the invention,

Fig. 5 illustrates the calculation of CRC symbols for such a subcode frame,

Fig. 6 shows a block diagram of an encoder according to a second embodiment of the invention, and

Fig. 7 shows a block diagram of a decoder according to the second embodiment of the invention.

Fig. 1 illustrates how TOC entries can be written in a non-standard way. As can be seen in the left column, each TOC entry, e.g. TOC entry A0, is written subsequently three times. However, while according to the standard way after three times writing TOC entry A0 three times A1 would have been written, this sequence is mixed up by exchanging the A1 and A2 pointers when writing all the TOC entries to the record carrier, e.g. a ROM disc. Said method can particularly be applied to CD audio or CD-ROM for mastering the TOC entries in mode-1.

When accessing such a record carrier a drive will usually reconstruct the TOC table in the standard way, i.e. when copying such a record carrier, the drive will write the TOC entries in the standard way as shown in the right column.

Other ways of mastering TOC entries in a detectable non-standard way include  
5 the usage of a mixing-up pattern which extends over a large number of frames, the repetition of every TOC entry or at least some of the TOC entries for a number different from the standard number, which is three times for CD audio or CD-ROM. Further, the TOC entries may only be mastered in a non-standard way in a confined area, e.g. only in a part of the lead-in of an optical record carrier.

10 An encoder according to a first embodiment for writing TOC entries in a non-standard way is shown in Fig. 2. Therein content is encoded into main channel data by a main channel data unit 1 and additional information such as table of content information and track timing information is encoded into subcode data by a subcode data unit 2. A TOC order  
15 modulator 3 is provided according to the present invention to modulate the order in which the TOC entries are written which order can be determined by a modulation signal. Said TOC order modulator can also be designed to modify the way in which TOC entries are written in any other non-standard way. An EFM modulator 4 is further provided for interleaving and modulating the main channel data and the subcode data into a channel bit stream which is finally recorded on a disc by a laser beam recorder 5.

20 Fig. 3 shows a first embodiment of a decoder according to the present invention which is adapted for detection of the way in which TOC entries are written. Therein an optical pick-up unit 6 is provided for accessing and reading a disc. The read channel bit stream is demodulated by an EFM demodulator 7 into main channel data processed by a main channel data unit 8 into the actual content and into subcode data by a  
25 subcode data unit 9. Said subcode data are also provided to a TOC order demodulator 10 detecting the way in which TOC entries are written, i.e. detecting if TOC entries are written in a standard or non-standard way. A demodulated signal is outputted as a result indicating if the accessed disc is an original (if TOC entries are written in a non-standard way) or a copy (if TOC entries are written in a standard way). Said information can be exploited to allow or  
30 prevent the output of a unique disc identifier or to allow or prevent further copying of said disc.

With reference to Figs. 4 and 5 a further embodiment for allowing a replay device to distinguish between an original and a copy shall be illustrated. Fig. 4 shows a Q-channel subcode frame according to said embodiment. Said subcode frame comprises in total

98 bits and has several fields: a synchronization field 20 comprising synchronization symbols S0, S1 (2 bits), a control field 21 (4 bits), an address field 22 (4 bits), a payload field 23 (70 bits), a cyclic redundancy check (CRC) field 24 (16 bits) and an extra synchronization field 25 comprising additional synchronization symbols S0, S1 (2 bits). According to said embodiment said additional subcode synchronization symbols in field 25 are added in mode-6 of the subcode Q-channel during mastering. Despite said additional synchronization symbols the remaining subcode data in said subcode frame as well as the main channel data can be retrieved correctly. However, copying of the additional synchronization symbols is impossible, since there are no valid subcode byte values, in particular since a detector does not expect to find synchronization symbols at such a position within a subcode frame. Moreover, a detector would correct the detected additional synchronization symbols into correct subcode data symbols, e.g. into subcode data symbols having symbol value zero.

The detection of additional synchronization symbols can be done by an interrupt saying "synchronization too early" or a similar signal. The firmware of a drive could exploit such an interrupt or a similar signal by only giving the payload, e.g. a UDI (Unique Disc Identifier) or a ROM disc identifier, to the outside if the additional synchronization symbols have been detected.

Fig. 5 illustrates how auxiliary data bits AUX for an auxiliary data field 26 are calculated. In a first step, said auxiliary data bits AUX are set to zero (0x00) and the CRC bits for CRC field 27 (16 bits) are calculated over the control field 21, the address field 22, the payload field 23 and the AUX field 26. The last two bits of said CRC field 27, i.e. of the calculated CRC bits, are placed in the AUX field 26, and in a second step the CRC bits for CRC field 27 are calculated again over the control field 21, the address field 22, the payload field 23 and the AUX field 26, now including new auxiliary data (0x03).

The resulting 16 bit CRC data have the property that the last two bits (bit 1 and 0) are zero. The first 14 CRC bits of said calculated CRC data are finally placed in the CRC field 28 (14 bits), while the last two subcode bits in the EFM frame are replaced by the additional synchronization symbols S0 and S1 (field 25).

During detection these additional synchronization bits will most probably render 2 bits with value zero in the Q-channel and result in a synchronization-too-early interrupt. When a disc is copied "raw", the last 2 bits will be zero, but during detection of the copy there will be no synchronization-too-early interrupt. The readout result of the Q-channel content will be the same for the original disc and the disc made with the raw-copy process.

Fig. 6 shows a block diagram of an encoder according to a second embodiment of the invention employing the use of additional synchronization symbols. Compared to the encoder shown in Fig. 2 an additional synchronization generator 11 is provided instead of the TOC order modulator for generating and embedding additional synchronization symbols of particular or all subcode channels. The EFM demodulator 7 of a decoder as shown in Fig. 7 will then be able to generate an interrupt "synchronization too early" in response to the detection of such additional synchronization symbols at a location within a frame where a synchronization symbol is not expected. Said interrupt can be provided to a ROM validation unit for validating the disc itself or disc ID data (e.g. UDI data) received from the subcode data unit 9, i.e. the output of said disc ID data can be controlled such that it is only outputted if an interrupt "synchronization too early" is received indicating that the accessed disc is an original but not a copy.

The present invention is not limited to the above-described embodiments. For example, the idea of mastering TOC entries in a non-standard way and the use of additional synchronization symbols can also be used simultaneously to even more increase the security of distinguishing between an original and a copy. Further, the way of embedding additional synchronization symbols, the number thereof and the location within a subcode frame can be different from the shown embodiment.



## CLAIMS:

18. 04. 2002

(51)

1. Method of copy detection of a record carrier on which table of content entries are mastered, characterized in that said table of content entries are mastered on said record carrier in a detectable non-standard way.
- 5 2. Method according to claim 1, wherein the sequence of table of content entries is mixed up compared to the standard sequence.
3. Method according to claim 1, wherein a number of repetitions of table of content entries is varied compared to the standard number of repetitions.
- 10 4. Method according to claim 1, wherein said table of content entries are only in a predetermined area on said record carrier mastered in a detectable non-standard way.
5. Method according to claim 1, further comprising the steps of:
  - 15 - storing subcode data on said record carrier in subcode frames of a subcode channel, each subcode frame comprising synchronization symbols and data symbols at predetermined positions within said subcode frame, and
  - assigning and storing a number of additional synchronization symbols to at least one subcode frame at positions provided for data symbols so that during read-out of said
  - 20 subcode channel a check signal can be generated indicating the presence or absence of said additional synchronization symbols.
6. Method according to claim 5, wherein a unique identifier uniquely identifying said record carrier is stored in said subcode frames and wherein said unique identifier is only
- 25 outputted if said check signal indicates the presence of additional synchronization symbols within said subcode frames.

7. Method according to claim 5, wherein copying of said record carrier is prevented if said check signal indicates the absence of additional synchronization symbols in said subcode frames.
- 5 8. Method according to claim 5, wherein additional synchronization symbols are stored in each subcode frame, in particular at the end of each subcode frame.
9. Method according to claim 5, wherein said subcode frames are part of a subcode Q-channel, in particular as defined in the Red Book for CD audio or in the Yellow  
10 Book for CD-ROM.
10. Method according to claim 5, wherein said data symbols stored in said subcode frames comprise a unique identifier and error correction data and wherein said additional synchronization symbols are stored to said at least one subcode frame on the cost  
15 of said unique identifier or said error correction data.
11. Method of copy protection of a record carrier, in particular according to claim 1, comprising the steps of:
- storing subcode data on said record carrier in subcode frames of a subcode  
20 channel, each subcode frame comprising synchronization symbols and data symbols at predetermined positions within said subcode frame, and
  - assigning and storing a number of additional synchronization symbols to at least one subcode frame at positions provided for data symbols so that during read-out of said subcode channel a check signal can be generated indicating the presence or absence of said  
25 additional synchronization symbols.
12. Method of read-out of a record carrier on which table of content entries are mastered, comprising the steps of:
- reading said table of content entries,
  - 30 - checking if said table of content entries are mastered in a standard or a non-standard way, and
  - outputting a signal indicating if said table of content entries are mastered in the standard or in a non-standard way.

13. Method according to claim 12, wherein a unique identifier uniquely identifying said record carrier read from said record carrier is only outputted if said table of content entries are mastered in a non-standard way.

5 14. Method according to claim 12, wherein copying of said record carrier is prevented if said table of content entries are mastered in a non-standard way.

15. Method according to claim 12, wherein on the record carrier subcode data are stored in subcode frames of a subcode channel, each subcode frame comprising  
10 synchronization symbols and data symbols at predetermined positions within said subcode frame, further comprising the steps of:

- read-out of said subcode channel,
- checking if additional synchronization symbols are stored to at least one subcode frame at positions provided for data symbols, and
- 15 - outputting a check signal indicating the presence or absence of said additional synchronization symbols in at least one subcode frame.

16. Method of read-out of a record carrier on which subcode data are stored in subcode frames of a subcode channel, each subcode frame comprising synchronization  
20 symbols and data symbols at predetermined positions within said subcode frame, comprising the steps of:

- read-out of said subcode channel,
- checking if additional synchronization symbols are stored to at least one subcode frame at positions provided for data symbols, and
- 25 - outputting a check signal indicating the presence or absence of said additional synchronization symbols in at least one subcode frame.

17. Apparatus for copy detection of a record carrier on which table of content entries are mastered, characterized by control means for controlling the mastering of said  
30 table of content entries on said record carrier such that said table of content entries are mastered in a detectable non-standard way.

18. Apparatus for copy protection of a record carrier, in particular according to claim 8, comprising:

- storing means for storing subcode data on said record carrier in subcode frames of a subcode channel, each subcode frame comprising synchronization symbols and data symbols at predetermined positions within said subcode frame, and

- assigning means for assigning and storing a number of additional  
5 synchronization symbols to at least one subcode frame at positions provided for data symbols so that during read-out of said subcode channel a check signal can be generated indicating the presence or absence of said additional synchronization symbols.

19. Apparatus for read-out of a record carrier on which table of content entries are  
10 mastered comprising:

- reading means for reading said table of content entries,  
- check means for checking if said table of content entries are mastered in a standard or a non-standard way, and  
- output means for outputting a signal indicating if said table of content entries  
15 are mastered in the standard or in a non-standard way.

20. Apparatus for read-out of a record carrier on which subcode data are stored in subcode frames of a subcode channel, each subcode frame comprising synchronization symbols and data symbols at predetermined positions within said subcode frame, comprising:

- 20 - reading means for read-out of said subcode channel,  
- check means for checking if additional synchronization symbols are stored to at least one subcode frame at positions provided for data symbols, and  
- output means for outputting a check signal indicating the presence or absence of said additional synchronization symbols in at least one subcode frame.

25

21. Record carrier on which table of content entries are mastered, characterized in that said table of content entries are mastered in a detectable non-standard way.

22. Record carrier on which subcode data are stored in subcode frames of a  
30 subcode channel, each subcode frame comprising synchronization symbols and data symbols at predetermined positions within said subcode frame, wherein a number of additional synchronization symbols are assigned and stored to at least one subcode frame at positions provided for data symbols so that during read-out of said subcode channel a check signal can be generated in response to detection of said additional synchronization symbols.

23. Computer program for implementing the method of claim 1, 11, 12 or 16, comprising program code means for causing a computer to perform the steps of the method as claimed in claim 1, 11, 12 or 16 when said computer program is run on a computer.

## ABSTRACT:

EPO - DG 1

18. 04. 2002

(51)

The invention relates to a method of copy detection of a record carrier. In one particular embodiment the table of content entries are mastered on the record carrier in a detectable non-standard way, e.g. the sequence of table of content entries is mixed or the number of repetitions is varied. According to another embodiment additional synchronization  
5 symbols are used in one or more subcode frames which can be detected by a read-out device in order to distinguish between an original or a copy of a record carrier.

Fig. 1.

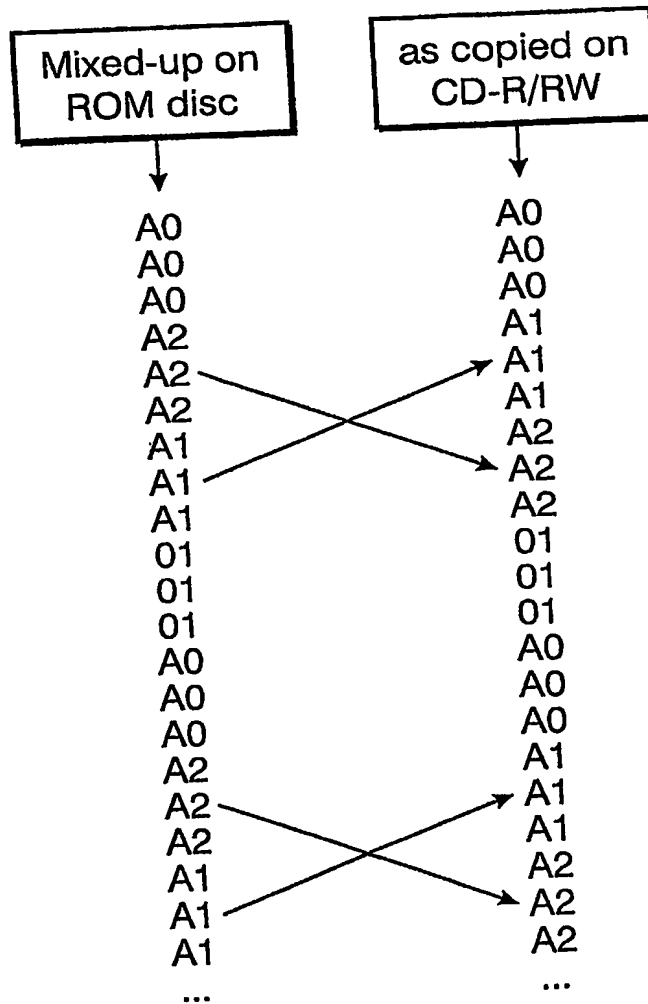


FIG.1

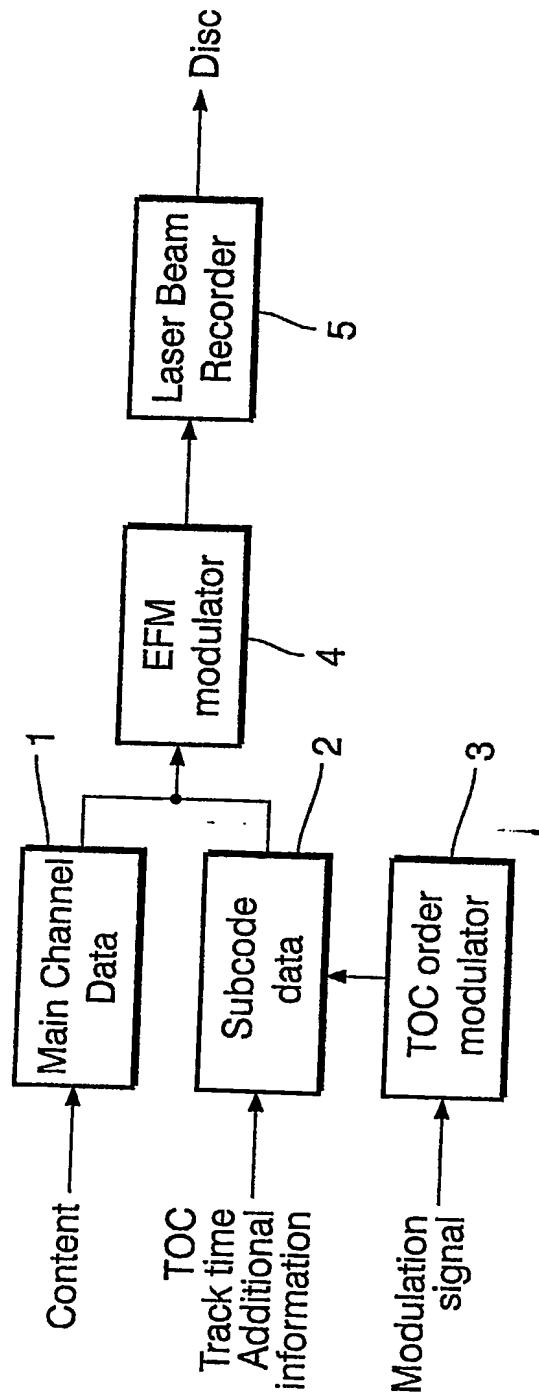


FIG.2



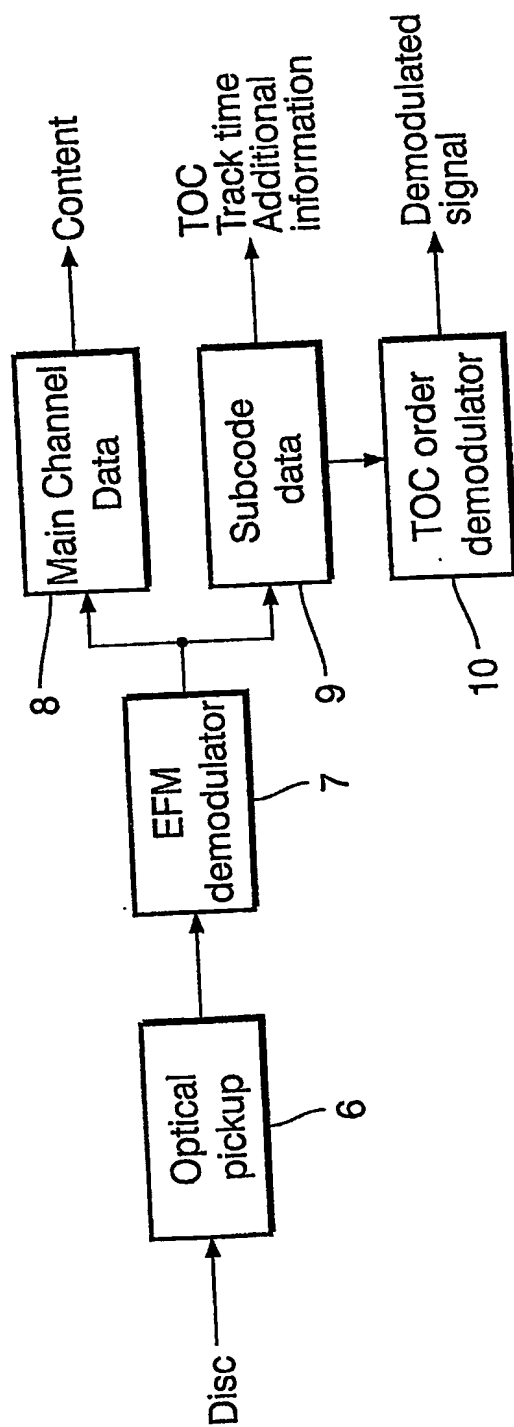


FIG.3

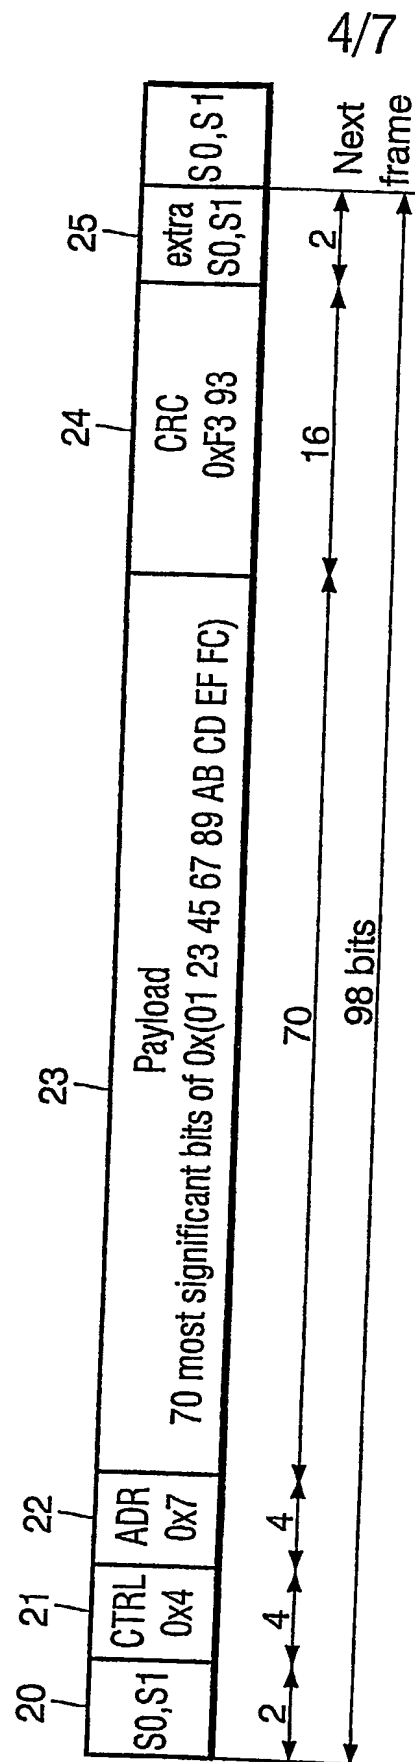


FIG.4

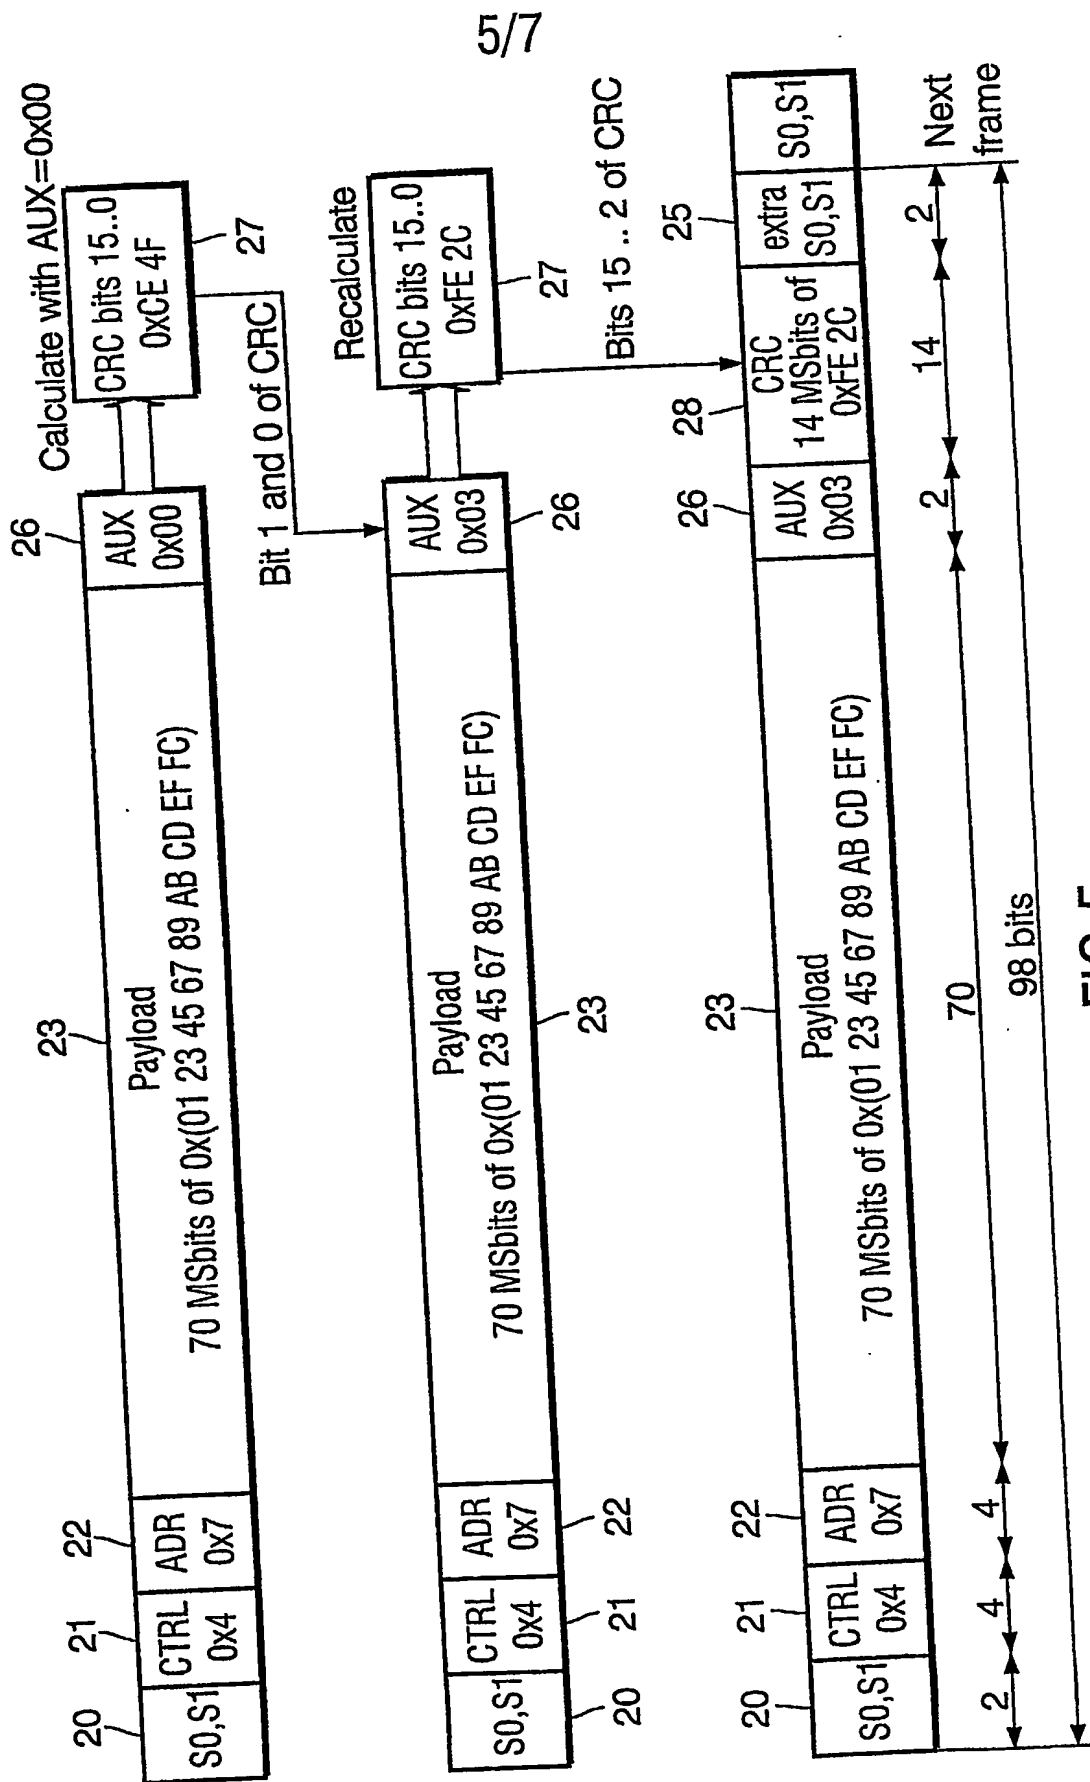


FIG.5

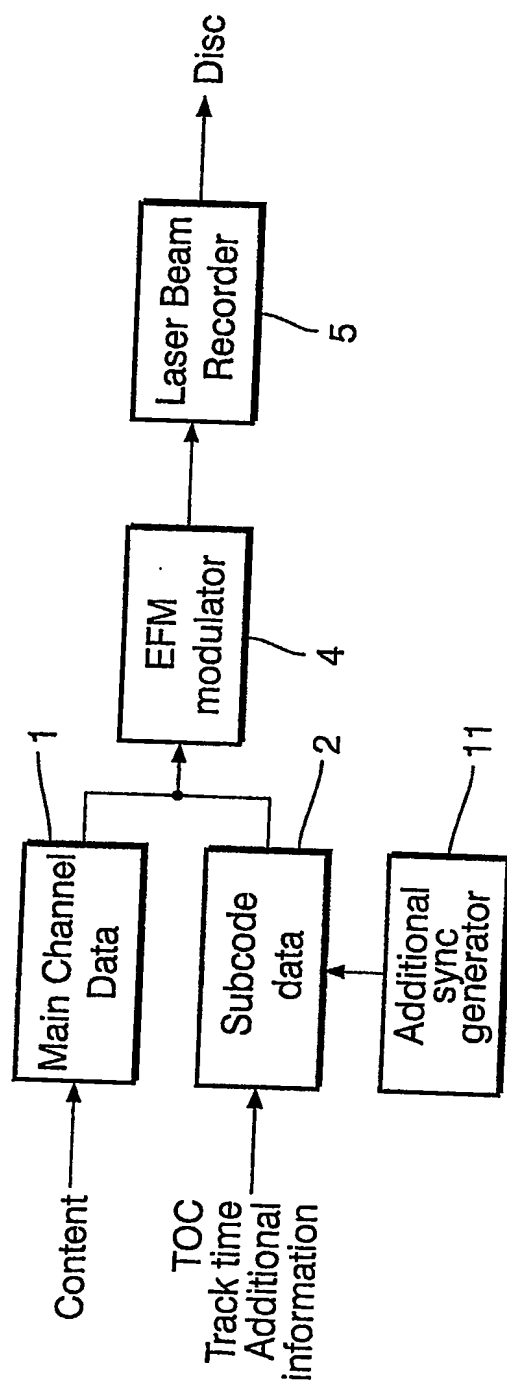


FIG.6

7/7

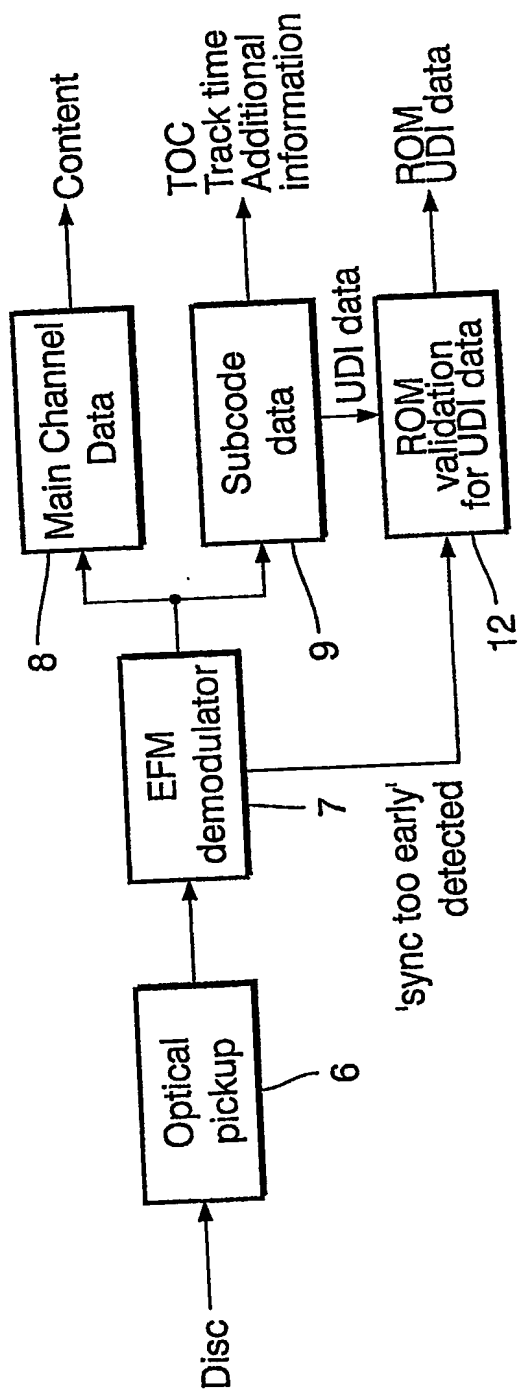


FIG. 7

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☒ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☒ FADED TEXT OR DRAWING
- ☒ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☒ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**